




CIRCUITI LINEARI RIGIDI A LED

Rigid LED strips

ART.	LED/m LED/m	Potenza (W/m) Power (W/m)	Flusso (Lm/m) Flux (Lm/m)	Alimentazione Input	Dim. (mm) Sizes (mm)
------	----------------	------------------------------	------------------------------	------------------------	-------------------------

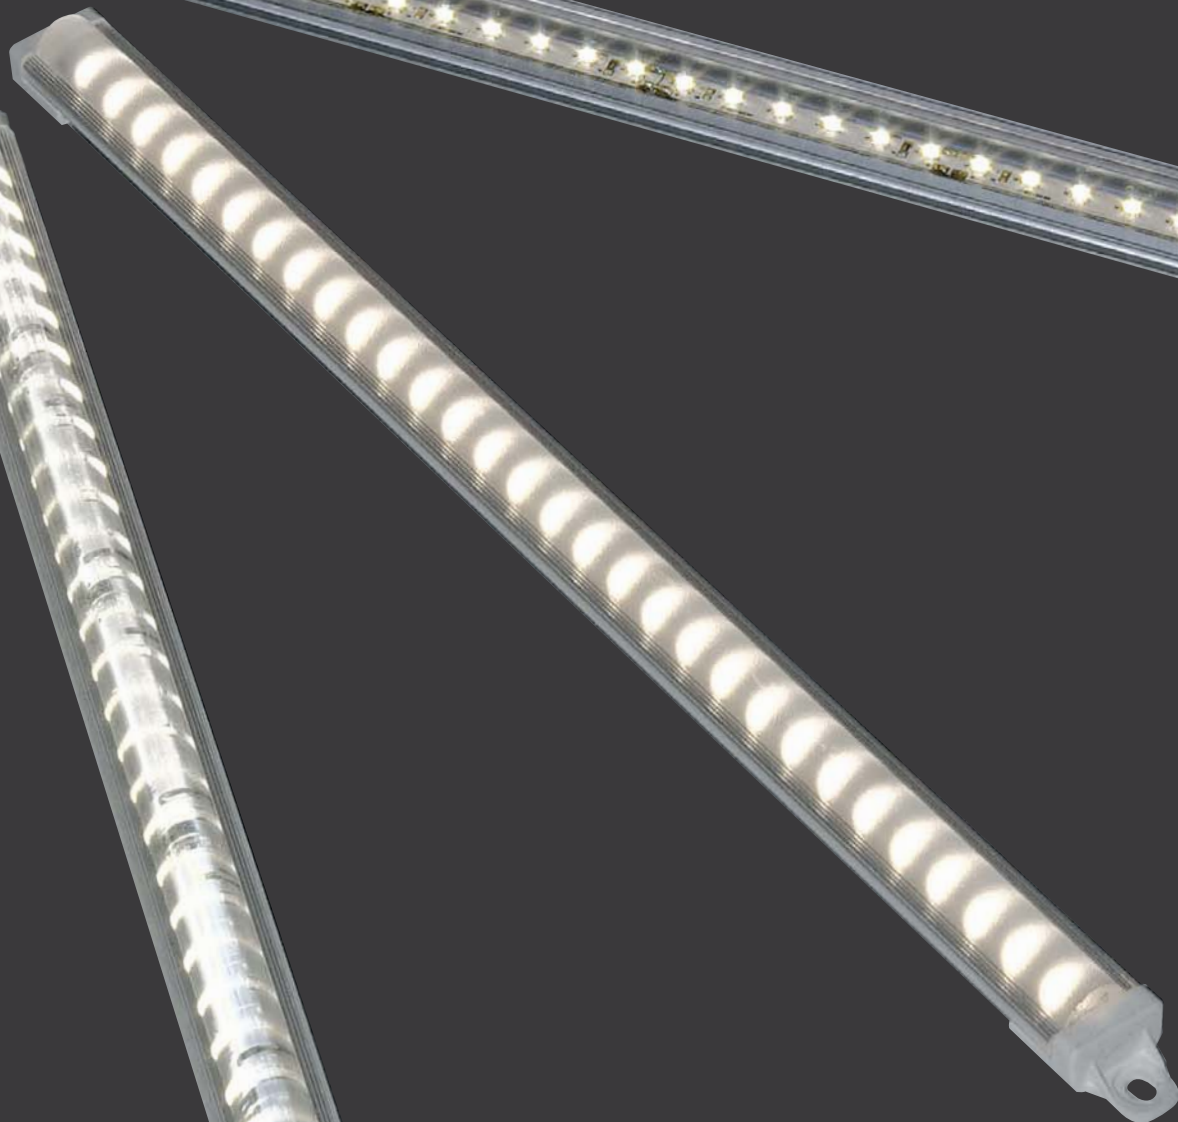

VE060WX-L	60	30 W/m	2400 Lm/m	24 V	28x20
-----------	----	--------	-----------	------	-------

Bianco freddo/neutro/caldo, RGB - Cool/neutral/warm white, RGB
Copertura trasparente/satinata - Transparent/satin cover



FA030WX-L	30	15 W/m	1200 Lm/m	24 V	23x20
FA060WX-L	60	30 W/m	2400 Lm/m	24 V	23x20

Bianco freddo/neutro/caldo, RGB - Cool/neutral/warm white, RGB
Copertura trasparente/smerigliata/opalina - Transparent/frosted/opaline cover
Disponibili lenti con angolo 30°/60°/90° - Available lens with 30°/60°/90° angle



PI050WX-L	50	6 W/m	600 Lm/m	12 V	24,3x20,3
PI100WX-L	100	12 W/m	1000 Lm/m	24 V	24,3x20,3

Bianco freddo/neutro/caldo - Cool/neutral/warm white



LI050WX-MA-L	50	6 W/m	600 Lm/m	12 V	10x8,5
LI100WX-MA-L	100	12 W/m	1000 Lm/m	24 V	10x8,5

Fissaggio magnetico - Magnetic connection
Bianco freddo/neutro/caldo - Cool/neutral/warm white
Disponibile con biadesivo nella versione da 50 LED/m
The 50 LED/m version available with adhesive connection

ART.	Potenza (W) Power (W)	Alimentazione Input	Output	Dim. (mm) Sizes (mm)
------	--------------------------	------------------------	--------	-------------------------

AL12V-8W	8 W	90-260 V	12 V	69,5x35x23
----------	-----	----------	------	------------



ALPLC12V-030W	30 W	90-260 V	12 V	160x46x30
---------------	------	----------	------	-----------



ALPLC12V-060W	60 W	90-260 V	12 V	181,5x62x35
ALPLC24V-060W	60 W	90-260 V	24 V	181,5x62x35

